

The High-Performer



1 Standard features

- iQFlow™
- First Shot
- IndividualClean
- HeatGuard
- FrankeOS

2 New A800 options

- 2nd and 3rd grinder
- Bean hopper: 1×2 kg, 2×1.2 kg or 3×1.2 kg, optionally lockable
- One or two separate powder dosing units: 1.2 kg (for chocolate or milk powder), optionally lockable
- Coffee grounds ejection assembly
- Cup sensor
- Steam wand S1, Autosteam S2 (enhanced milk foaming) or Autosteam Pro S3 (automatic milk foaming)
- DualMilk for low cross contamination (only with FoamMaster™ Pro)
- IndividualMilk (IMI) with zero cross-contamination (only with FoamMaster™ Pro)
- ActiveChill

3 Milk systems

- FoamMaster™ Pro (FM Pro): hot and cold milk and milk foam, individually adjustable consistency, with cooling unit in Franke design
- FoamMaster™ Plus (FM Plus): hot and cold milk and milk foam, individually adjustable consistency, compatible with Franke SU06, SU12 and CU09 EC Plus or third-party cooling units

4 Milk cleaning systems

- CleanMaster (CM): automatic dosage of cleaning product (for SU06 CM Pro cooling unit)
- EasyClean (EC): manual addition of cleaning product

5 Flavor Station

- Automatic dosing station for up to 6 flavors

6 Accounting system

- For various payment methods, coins and cashless
- Ideally suited to public/private vending applications

7 Cup warmer

- With three heatable shelves

Flexibility

Our product portfolio allows various assembly options — tailored to your needs.



Franke Kaffeemaschinen AG
cs-info.ch@franke.com

Franke Coffee Systems GmbH
cs-info.de@franke.com

Franke Coffee Systems Americas
cs-coffeesales.us@franke.com

Franke Coffee Systems UK
sales@frankecoffeesystems.co.uk

coffee.franke.com

590.0739.833/09.26/CH-EN/Subject to dimensional, design and version changes.



Built for peak performance in busy venues, the new A800 delivers unmatched output without sacrificing quality. Engineered for high-demand moments, it combines speed, precision, consistency, and ease of use to keep coffee service running smoothly, even during the busiest hours. With extended configuration options and smart functionality designed for demanding workflows, the new A800 ensures service never slows down: more output and less pressure for any setting and any time of the day.

CAPACITY*	SINGLE	PARALLEL
Espresso	150	240
Cappuccino	135	180
Coffee	111	150
Hot water	120	

* Cups per hour according to DIN 18873

** Classic A600NM vs. New A600NM, varies by configuration, according to DIN 18873-2

NEW A800



New FoamMaster
Perfect, silky barista foam at the touch of a button



Touch screen
Best-in-class 10.4" display for intuitive served and self-serve experience



Peak performance
Simultaneous serving of coffee, milk, and hot water through parallel dispensing

Technical Data

Machine Models

Model	Power
A800 NM	380-415 V, 3L N PE, 50-60 Hz, 7.4 kW-8.8 kW (16 A)
A800 FM Plus	
A800 FM Pro	
Dimensions	340 mm/831 mm/602 mm (W/H/D)
Weight (empty)	approx. 41 - 58 kg
Colors	Onyx, Granite, Mahogany

Water connection

Main water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80–800 kPa (0.8–8.0 bar)
Flowrate	> 0.1l/sec
Water temperature	< 25°C
Total hardness	4–8 °dH GH (German total hardness)/ 7–14 °fH GH (French total hardness)/ 70–140 ppm (mg/l)
Carbonate hardness	3–6 °dH KH (carbonate hardness)/ 50–105 ppm (mg/l)
Acid content/pH value	6.5–7.5 pH
Chlorine content	<0.5 mg/l

Water drain






Drain hose	Dia. = 16 mm, L = 2000 mm
------------	---------------------------

Add-on units

1 Cooling unit	SU06 EC Plus & Pro and SU06 CM Pro
Electrical connection	220–240 V, 1L N PE, 50-60 Hz (10 A)
Dimensions	300 mm/626 mm/477 mm (W/H/D)
Weight (empty)	approx. 28 - 32 kg
Compatible with	New A800 FM Plus & Pro
Colors	Onyx, Granite, Mahogany
Position	Left hand FM Plus & FM Pro, under-counter only FM Pro

Cooling unit	SU12 EC Plus & Pro
Electrical connection	220–240 V, 1L N PE, 50-60 Hz (10 A)
Dimensions	340 mm/626 mm/477 mm (W/H/D)
Weight (empty)	approx. 35 - 39 kg
Compatible with	New A800 FM Plus & FM Pro
Colors	Onyx, Granite, Mahogany
Position	Left hand FM Plus & FM Pro, under-counter only FM Pro

Cooling unit	CU09 EC (9I)
Electrical connection	220-240 V, 1LNPE, 50 - 60 Hz (10A)
Dimensions	240 mm/590 mm/450 mm (W/H/D)
Weight (empty)	18 kg
Compatible with	New A800 FM Plus
Colors	Black
Position	Left hand side

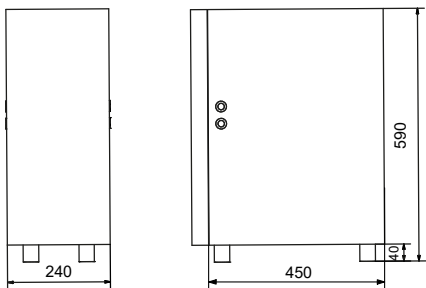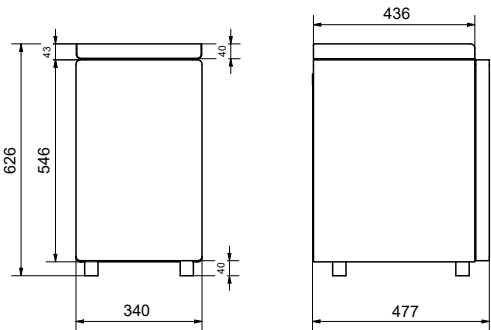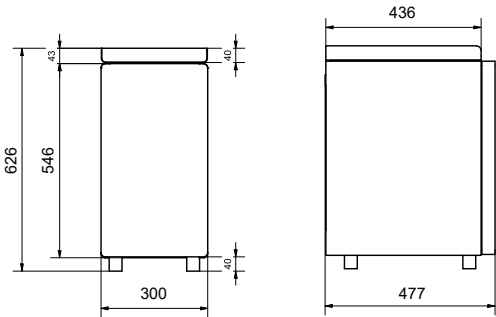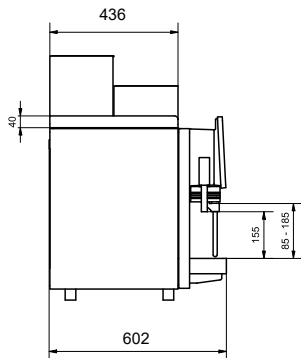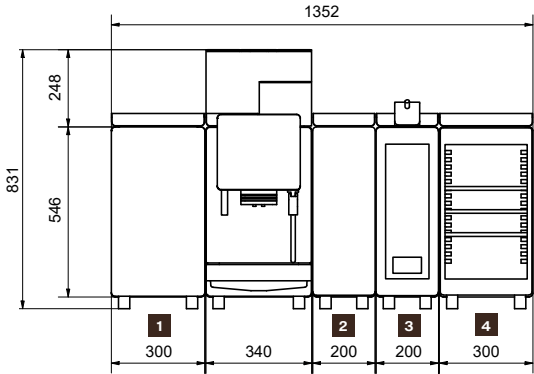

Add-on units

2 Flavor Station	FS EC
Electrical connection	220–240 V, 1L N PE, 75 W, 50-60 Hz (10 A)
Dimensions	200 mm/626 mm/436 mm (W/H/D)
Weight (empty)	approx. 24 kg
Compatible with	New A800 FM Plus & FM Pro
Colors	Onyx, Granite, Mahogany
Position	Right hand next to machine

Flavor Station	FSU60
Electrical connection	220-240 V, 1L N PE, 50 W, 50-60 Hz (10 A)
Dimensions	235 mm/415 mm/350 mm (W/H/D)
Weight (empty)	approx. 15 kg
Compatible with	New A800 FM Plus & FM Pro
Colors	Onyx
Position	under-counter

3 Accounting system	AC200
Accounting systems	Coin validator, Coin changer, Cashless system
Electrical connection	85–264 V, 1L N PE, 50-60 Hz (10 A)
Dimensions	200 mm/546 mm/477 mm (W/H/D)
Weight (empty)	approx. 20 kg
Compatible with	all New A800 models
Colors	Onyx, Granite, Mahogany

Accounting system	AC125 CL
Electrical connection	85-264 V, 1L N PE, 50-60 Hz (10 A)
Dimensions	125 mm/150 mm/310 mm (W/H/D)
Weight (empty)	approx. 2 kg
Compatible with	all New A800 models
Colors	Onyx

4 Cup warmer	CW
Electrical connection	220-240 V AC, 1L N PE, 110-130 W, 50-60 Hz (10 A)
	100 V AC, 1L N PE, 80 W, 50-60 Hz (10 A)
	220 V AC, 1L N PE, 110 W, 50-60 Hz (10 A)
	300 mm/626mm/438 mm (W/H/D)
	approx. 21 kg
	all New A800 models
	Onyx

Dimensions
Weight (empty)
Compatible with
Colors

