



Would you like to create memorable and individualized experiences for your customers while providing the highest in-cup-quality? The S700 is the answer: It merges the convenience and intelligence of a fully automatic machine with the passion and creativity of a two-step machine. Our S700 is here to help baristas unleash their full creative potential thanks to its ground-breaking iQFlow™ technology, ability to produce 160 espressos an hour, and three-boiler system. So if you're looking for the best mix of human creativity, coffee competence, passion, and advanced coffee machine technology, turn to the S700.

CAPACITY*	SINGLE	PARALLEL
Espresso	160	138
Coffee	109	141
Hot water	164	

\*Cups per hour according to DIN 18873 (Power: 220-240 V)



### Touch screen

Practical 8-inch touch screen for efficient easy operation



### iQFlow™

the groundbreaking technology that extracts more flavor for unrivaled in-cup-quality



### Professional steam wand

Autosteam or Autosteam Pro

# Technical Data

## Machine Models

Model	Power
S700	380–415 V 3LNPE 50/60 Hz (16 A) 220–240 V 1LNPE 50/60 Hz (30 A) 200–220 V 3LPE 50/60 Hz (30 A) 208 V 2LPE 60 Hz (24 A) 380 V 3LNPE 50 Hz (16 A)
Dimensions	340 mm/750 mm/600 mm (W/H/D)
Weight (empty)	approx. 58 kg
Colors	Black and anthracite

## Water connection

Mains water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80–800 kPa (0.8–8.0 bar)
Flowrate	> 0.1 l/sec
Water temperature	< 25°C
Total hardness	4–8 °dH GH (German total hardness)/ 7–14 °fH GH (French total hardness)/ 70–140 ppm (mg/l)
Carbonate hardness	3–6 °dH KH (carbonate hardness)/ 50–105 ppm (mg/l)
Acid content/pH value	6.5–7.5 pH
Chlorine content	< 0.5 mg/l





## Water drain

Drain hose	Dia. = 16 mm, L = 2000 mm
------------	---------------------------

## Add-on units

CUP WARMER	CW
Electrical connection	220–240 VAC, 1LNPE, 110–130 W, 50–60 Hz 110–127 VAC, 1LNPE, 80–130 W, 50–60 Hz 100 VAC, 1LNPE, 80 W, 50–60 Hz 220 VAC, 1LNPE, 110 W, 50–60 Hz
Weight (empty)	approx. 20 kg
Colors	Black or anthracite

\*Fuse varies by country

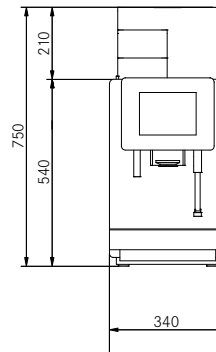

## THE CREATIVE ONE

### 1 S700 OPTIONS

- First shot
- Coffee grounds ejector
- Raised feet (100 mm)
- Autosteam Pro (S3)  
(automatic milk foaming)

### 2 CUP WARMER

- With four heatable trays
- Integrated accounting system



Franke Kaffeemaschinen AG  
cs-info.ch@franke.com

Franke Coffee Systems GmbH  
cs-info.de@franke.com

Franke Coffee Systems Americas  
cs-coffeesales.us@franke.com

Franke Coffee Systems UK  
sales@frankecoffeesystems.co.uk

coffee.franke.com